
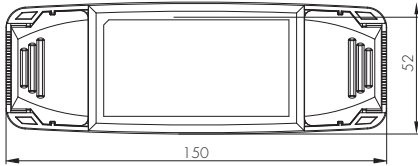


INSTRUCTION MANUAL FOR 10W DALI LED DRIVER MODEL NO.: HED6010

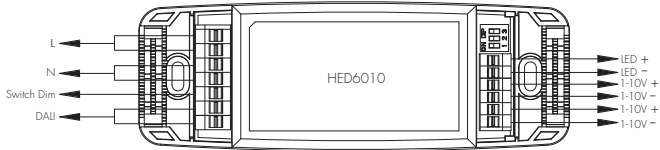


LED CURRENT SELECTION


The current can be easily configured by choosing the correct combination of the DIP switches (see table below):

mA	1	2	3	
500mA	●	●	●	I
350mA	●	●	○	II
230mA	●	○	○	III
195mA	○	○	○	IV


WIRING DIAGRAM

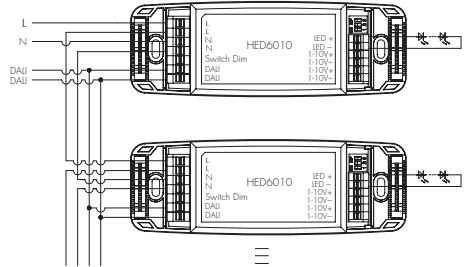

DALI wiring diagram

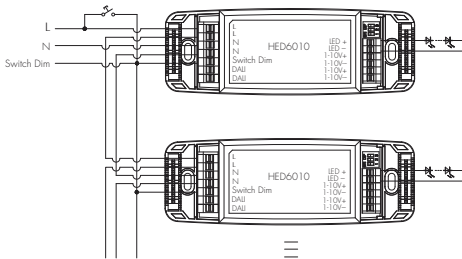

Switch-DIM wiring diagram

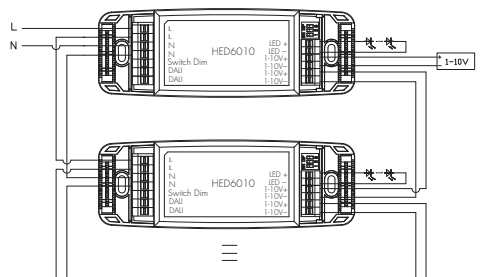

1-10V dimming wiring diagram

Note:1. "DALI" is prior to both "Switch-Dim" and "1-10V".

2. "Switch-Dim" is prior to "1-10V". To shift dimming from "Switch-Dim" to "1-10V", the end-user should short-circuit "1-10V" first for at least 3S.

Highlights

- Standby power < 0.5W
- Automatic output reduction 80%--60%--40%--20% against overheat
- Failure DALI feedback
- Flicker-free dimming from 100%~30%
- In compliance with DALI 2 standard.
- DALI and switch-Dim can be used at the same time.

Switch-Dim



- On/off control: short push (<0.4s) on the switch.
Note: Short push should be at least 0.12s, and the time interval between two pushes should be also longer than 0.12s.
- Stepless dimming: long push (>0.9s) on the switch.
- For fine tuning of light level: With every other long push, the light level goes to the opposite direction.
- Built-in with permanent memory: light returns to the previous dimming level when switched off and on again, even at power failure.

Synchronization

Up to 64pcs drivers can be connected to the same switch, thanks to the programme. This means there is no need for any additional synchrony wire in large installation, where many drivers should be controlled by one switch.

- Please follow the step below to achieve synchronization function if more than one driver are connected to the same push button:
- Do a long push for more than 15s, then the system is synchronized and all lights in the group dim down to 50%.

Permanent Memory

This driver has built-in permanent memory against power failure, which means the light always starts up at the previous level when it was switched off last time.

Manual Override

DALI and switch-Dim. can be connected at the same time, to enable manual override function for end-users to switch on/off or adjust the dimming level by the push-switch. This feature makes the product more user-friendly, and could provide more options for some extra ordinary demands.

- Short push (<0.4s): on/off control;
- Long push (>0.9s): dim up/down the dimming level.
- If customers do not want to have this manual override function, just leave the "switch" terminal alone, and not connected to any wire.
- This manual override is only valid before the next DALI command, meaning the latest action, either from DALI or switch-Dim, stays in control.

SPECIFICATION

Mains voltage	220 ~240VAC 50/60Hz	
Mains current	75 ~ 65mA	
Max. output power/current/voltage	8W/195mA/12~41V 12.5W/350mA/12~36V	9.5W/230mA/12~41V 12.5W/500mA/12~25V
Power factor	≥ 0.90	
Operation temperature	Ta: -20~ +50 °C Tc: +75 °C	
Max. Efficiency	81%	
Dimming interface	DALI, Switch-Dim., 1-10V	
Dimming range	1~30% PWM dimming; 30~100% analogue dimming.	
Stand-by power consumption	<0.5W	
Abnormal protection	Output short-circuit protection with auto-reset	
Over-heat protection	Over-heat protection with auto-reset	
EMC standard	EN55015, EN61547, EN61000-3-2/3	
Safety standard	EN61347-1, EN61347-2-13, EN60598-1	
DALI standard	IEC62386-101,102, 207	
Dielectric strength	Input→output : 3750VAC	
Certification	CE	
IP grade	IP20	