

ROBUS **R** LEATHER


Real leather floor tiles, without the cost.

Corinthian


Robus Leather Floor Tiles are crafted from leather scrap to produce a durable and beautiful floor that is environmentally responsible yet practical and affordable.

The Robus Corinthian Line, available only through our internet distributors, offers a variety of colors and finishes to design one-of-a-kind interiors that command attention. These stunning leather floor tiles create luxurious surroundings that are practical, long-lasting and easy to maintain. You can have Robus Leather Floor Tiles in virtually any room in your home or workplace. The affordability and durability of this floor system will delight you for years.

Ostrich Finishes

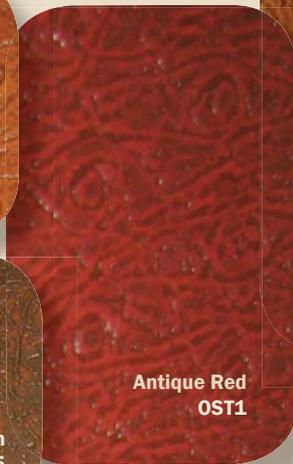

OK Croc Finishes

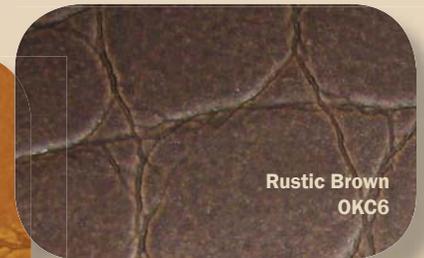

Disclaimer: Leather colors shown have been reproduced within the limitations of the printing process. Color samples shown can vary slightly from the actual leathers.

ROBUS LEATHER

Robus Bonded Leather Floor Tiles

Installation Instruction Steps:

- Remove leather tiles from packing and allow to acclimate for at **least** 72-hours.
- Be certain that substrate is structurally sound, level, oil-free, clean and free of dust. Leather tiles may be installed on unpainted dry wood or fully cured concrete surfaces.
- Install tiles using **Robus Leather Premium Adhesive**. Use trowel size of 1/16 x 1/16 x 1/16 at a spread rate of 150 sq. ft. per gallon.
- Tiles should be rolled during and after installation using a 75-lb to 100-lb roller.
- To seal seams and protect tiles, apply **Robus Leather Protective Coating and Sealant** 24-hours after installation.
- Please see **www.robust.com** for full installation instructions.

Maintenance:

- Use a damp (not wet) mop or soft cloth.
- Never use harsh detergent cleaners, liquid floor waxes, polishes or ammonia.
- Only use a soft brush attachment when vacuuming.

Limited Residential Warranty. Robus Bonded Leather Floor Tiles are warranted not to be defective in material or in workmanship for ten (10) years from the date of purchase. See **www.robust.com** for full warranty information.

Architectural Specifications: *CSI Master Specifications:*

Product Name:	Robus Leather Recycled Floor Tiles
Material:	Recycled Leather, Natural Latex
Tile Size:	24" x 24"
Thickness:	3.2 mm (0.125")
Smoke Density:	ASTM E-662 Less than 200 (20m, flaming)
Flooring Radiant Panel:	ASTM E-648 Class II
Static Load Limit:	ASTM F-970 100 lbs PSI



ROBUS LEATHER

**1100 W. Hutchinson Lane
Madison, Indiana 47250 U.S.A.
Phone: 812-273-4183
Fax: 812-273-6671
www.robust.com**