


## BATHROOM

### DUAL VOLTAGE 7W LED SHAVER LIGHT

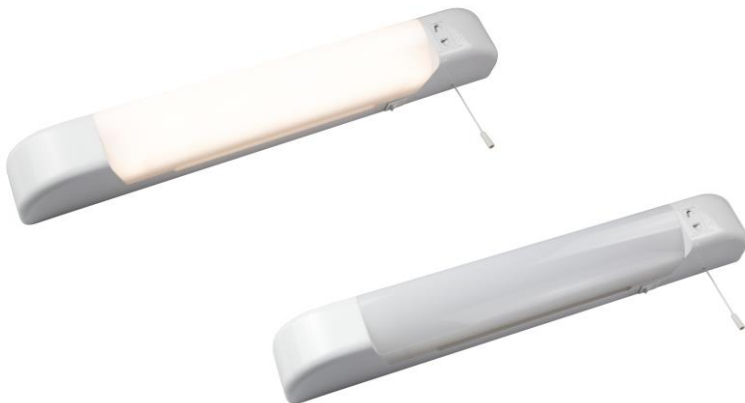

<b>Codes</b>	White:	RSH7LED-01
	Chrome:	RSH7LED-03
<b>Comparable to:</b>	60W Incandescent	
<b>Light Output L<sub>100</sub> (lm):</b>	400	
<b>Beam Angle (deg):</b>	120	
<b>Colour Temp L<sub>100</sub> (k):</b>	4,000	
<b>CRI L<sub>100</sub> (Ra):</b>	87	
<b>Total Power Consumed (W):</b>	7	
<b>Efficacy (lm/cctW):</b>	57	
<b>Power Factor:</b>	0.65	
<b>Rated LED life (hrs):</b>	30,000	
<b>Ingress Protection (IP):</b>	20	
<b>Ambient Operating Temp (°C):</b>	-20<T <sub>a</sub> <+45	
<b>Length/Height/Projection (mm):</b>	490/60/70	
<b>Min Order Qty/Carton Qty:</b>	1/4	
<b>Weight (Kg):</b>	1.05	
<b>Warranty (yrs):</b>	3	

The gentle curves of this high quality and attractive surface mount shaver light will add a touch of class to any bathroom or cloak. It is constructed using high quality polycarbonate which makes cleaning simple to retain its pleasing aesthetics.

It also provides a "separates" option where lighting is not integral to the mirror.

The shaver light facilitates use with both 230vac and 115vac shavers with a simple rocker switch.

- Bathrooms
- Executive Toilets
- Changing Rooms
- Restaurant Cloakrooms
- Hotels
- Hairdressers
- Rest Rooms
- Beauty Salons

FEATURES	BENEFITS
<ul style="list-style-type: none"> <li>Smooth white or chrome finish polycarbonate body</li> </ul>	<ul style="list-style-type: none"> <li>Easy to wipe clean to retain "as new" aesthetics</li> <li>Choice of colour finish to match or contrast décor, other fittings or furniture</li> </ul>
<ul style="list-style-type: none"> <li>Opal diffuser with built in prisms</li> </ul>	<ul style="list-style-type: none"> <li>Maximum light is transmitted through the diffuser</li> <li>Reduced glare</li> <li>Excellent light uniformity for clear image and vision</li> </ul>
<ul style="list-style-type: none"> <li>LED PCB with 32 high quality, high CRI SMD LED's provide                             <ul style="list-style-type: none"> <li>Excellent light output of 400 lumens</li> <li>Very low power consumption of 7W</li> <li>Solid state technology                                     <ul style="list-style-type: none"> <li>No filaments to break or electrode seals to fail which is often a cause of many traditional light source failures</li> <li>Rugged and less susceptible to failure through knocks, building vibration and hot to cold temperature fluctuations</li> </ul> </li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>High CRI ensures good light quality for excellent visibility and image reproduction</li> <li>When compared to linear incandescent:                             <ul style="list-style-type: none"> <li>Provides similar light output</li> <li>Saves almost 90% energy</li> </ul> </li> <li>Has a rated LED life of 30,000 hours, that's about 30 times that of traditional light sources so no inconvenient lamp failures</li> <li>Provides instant full light output</li> </ul>
<ul style="list-style-type: none"> <li>Elongated fixing holes</li> </ul>	<ul style="list-style-type: none"> <li>Makes horizontal and vertical alignment easy during installation</li> </ul>
<ul style="list-style-type: none"> <li>Selectable dual voltage output switch</li> <li>20VA maximum rating</li> </ul>	<ul style="list-style-type: none"> <li>Suitable for UK 230vac or other 115vac shavers</li> <li>Suitable for the most powerful of shavers and tooth brushes</li> </ul>
<ul style="list-style-type: none"> <li>160mm long pull cord</li> </ul>	<ul style="list-style-type: none"> <li>Can be switched from the mirror or as part of the room lighting</li> </ul>
<ul style="list-style-type: none"> <li>IP 20</li> </ul>	<ul style="list-style-type: none"> <li>Ideal for installation outside of zones 1 &amp; 2</li> </ul>
<ul style="list-style-type: none"> <li>3 year Robus no quibble warranty</li> </ul>	<ul style="list-style-type: none"> <li>Provides confidence that it is a high quality, long life product with no website warranty registration forms to fill in</li> </ul>

PLEASE NOTE – INFORMATION CONTAINED IN THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE